


HW PAV - PLASTIC AXIAL VENTILATOR

PLASTIC AXIAL VENTILATOR PLASTIC TUBE, HIGH EFFICIENCY, LIGHT WEIGHT, CORROSION PROOF

DIAM. 315-630 mm

T -40° C to +120° C°

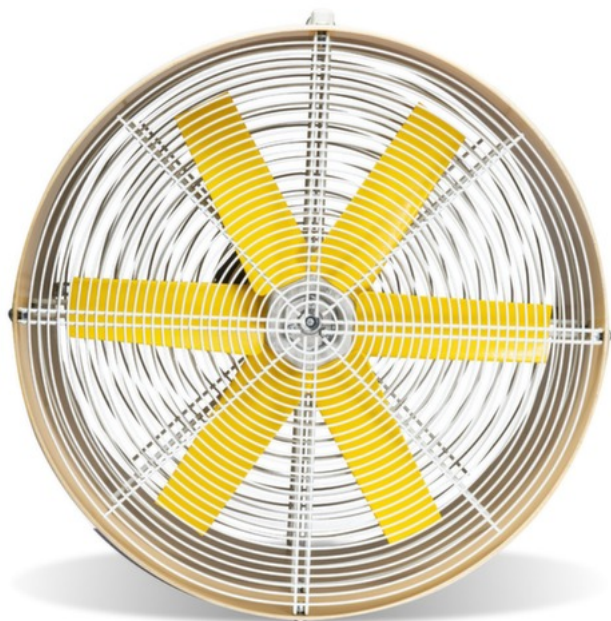

Light weight plastic axial ventilators diameter up to 630 mm

HW PAV ventilators are manufactured assembling **HW axial impellers with a B5 electric motor, a rounded case and a protection mesh.**


Depending on the application, the impellers can be made of aluminum or plastics (PPG, PAG). The rounded case is made of plastics and its length is customizable. Electric B5 motors are chosen from top suppliers and carry all the relevant certifications.

Depending on the way the impellers are configured, the ventilator can provide either a sucking or a blowing air flow.

PAV ventilators can operate at temperatures between -20°C and +60°C, depending on the technical specifications of the motor.

Noise emissions can be taken under control through a highly customizable design of each component.

HW PAV ventilators have been tested in our AMCA 210/07 wind tunnel and comply with the requirements of the EU Energy Related Products (ErP) Directive 2015.

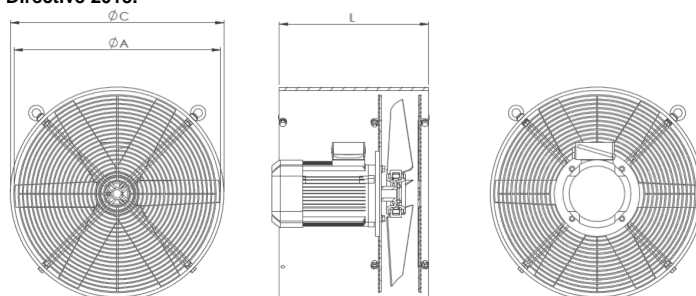

PAV	ØA mm	ØC mm	L mm	Case THK mm
315	305	315	350-600 (*)	4,9
400	387	400	350-600 (*)	6,2
500	484	500	350-600 (*)	7,8
630	610	630	350-600 (*)	9,8

(*) case length customizable upon request